

Sight Flow Indicators (straight line) with *pipe - thread* connection **BSP (G)** or **NPT**



Cast Iron GG 25 (EN-GJL-250) max. 16 bar
Cast Steel GS-C 25 (1.0619 / GP240GH)
Stainless Steel WN 1.4408

Bauform 881

Application:

The NORIS flow indicators are used for optical control of fluids and gases, for horizontal and vertical pipe-lines.

Installation:

Optional
Take care of flow direction

Operating conditions:

Working pressure: max. 16 / 25 / 40 bar
 Working temperature: max. 150°C or 280°C

Certificate: (Option)

Acc. to EN 10204 - 2.2 or
 Acc. to EN 10204 - 3.1

Werkstoffe:

Body	GG 25	GS-C 25	1.4408
Covers	GG 25	GS-C 25	1.4408 / 1.4301
Screws	4.6 / 5.6 gal.		A4-70
Sight glasses	Borosilicate glass DIN 7080 (280°C) Soda lime glass DIN 8902 (150°C)		
Gaskets	Graphite, (or other materials)		


Options:

with - Spinner
 - Flap
 - Sight glass light - fittings

Ordering example:

Sight Flow Indicators Bauform 881
 Body GG 25,
 Borosilicate glass DIN 7080-16bar,
 G 3/4"

Female-Threaded-Design

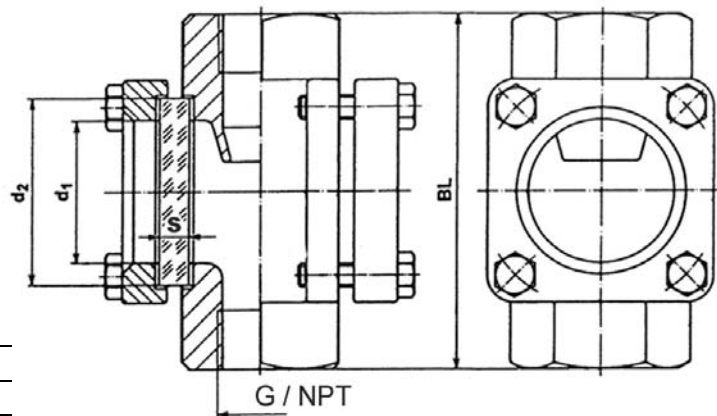

Dimensions:

BSP (G) or NPT	BL	d ₁	Glass plate			
			d ₂	S		
				16	25	40 bar
1/4" 3/8" 1/2"	100	32	45	10	10	10
3/4" 1"	120	48	63	10	12	15
1 1/4"	160	65	80	12	15	20
1 1/2"	160	65	80	12	15	20
2"	230 180 (GG)	80	100	15	20	25

NPT-thread only in GS-C 25 or 1.4408

Modifications reserved



AVEMAR CZECH s.r.o. | speciální armatury pro měření a regulaci |
 Branch office | Podvihovská 378/12C | 747 70 Opava 9 - Komárov | Česká republika |
 Tel.: +420 553 764 015 | Fax: +420 553 654 820 | www.avemar.cz | avemar@avemar.cz |